




tolerances according to ISO 2548 class C ann. B

Type **AP6H**

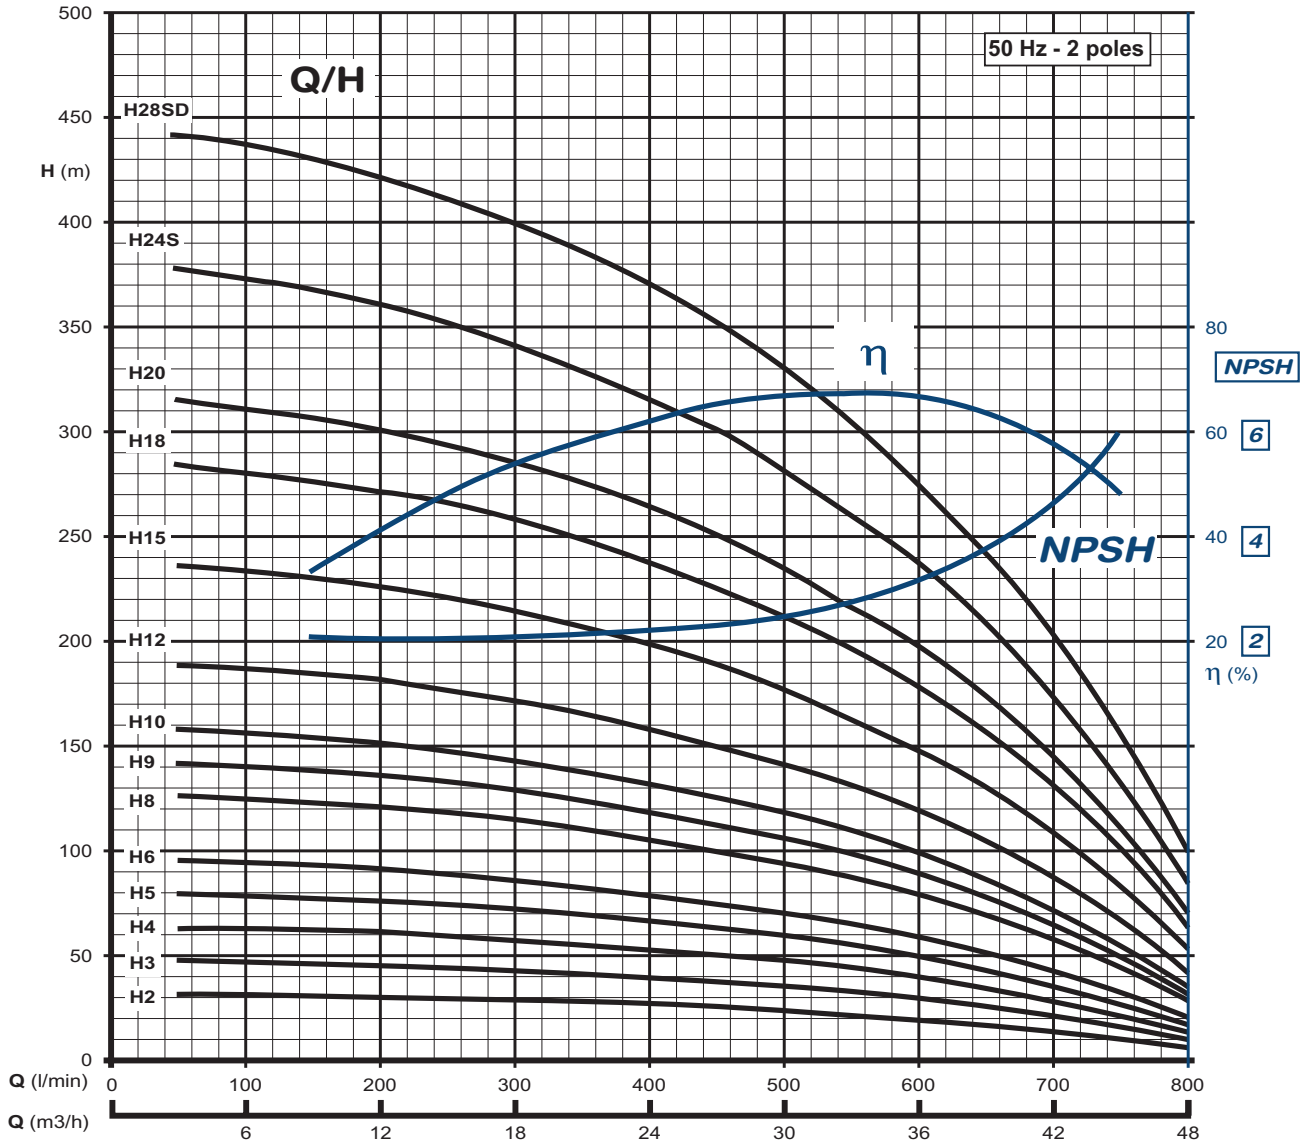

DIMENSIONS, WEIGHTS AND ELECTRICAL DATA

3Ph - 380-400-415V

TYPE	HP	Lenght (mm)			Weight (Kg)			400V Amp
		P.L.	M.L.	T.L.	PUMP	MOTOR	TOTAL	
AP6H2	4 *	408	423	831	6,9	16	22,9	7,8
AP6H3	5,5 *	468	583	1051	7,8	21,8	29,6	10
AP6H4	7,5 *	528	697	1225	8,7	27,3	36	13,7
AP6H5	10	588	646	1234	9,6	44	53,6	16
AP6H6	12,5	648	679	1327	10,4	46,7	57,1	20,7
AP6H8	15	768	711	1479	12,2	49	61,2	23,3
AP6H9	17,5	828	776	1604	13,1	56,5	69,6	30
AP6H10	20	888	776	1664	14	56,5	70,5	31,3
AP6H12	25	1008	842	1850	15,8	62	77,8	38,5
AP6H15	30	1188	907	2095	18,5	68,8	87,3	45,3
AP6H18	35	1420	1037	2457	22,3	85	107,3	55
AP6H20	40	1540	1037	2577	24,1	85	109,1	61,8
AP6H24S	50	1780	1405	3185	27,7	115	142,7	73
AP6H28SD	60	2143	1558	3701	33,5	130	163,5	89,5

* Motor 4"

